
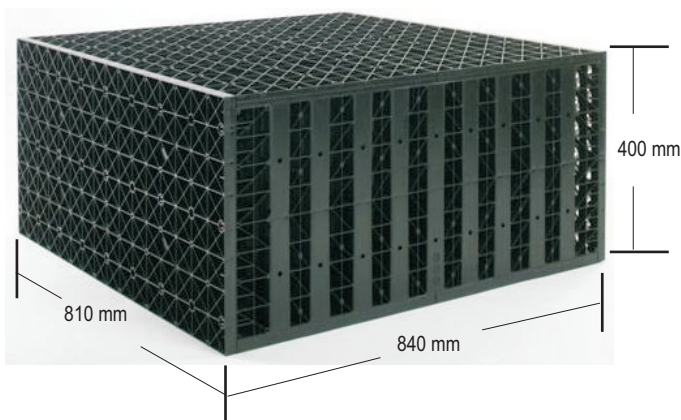


Funke North America Ltd.

Telephone: 705-528-1064
Toll Free: 888-528-1064
Fax: 705-528-0970

Email: info@funkenorthamericaltd.com
www.funkenorthamericaltd.com

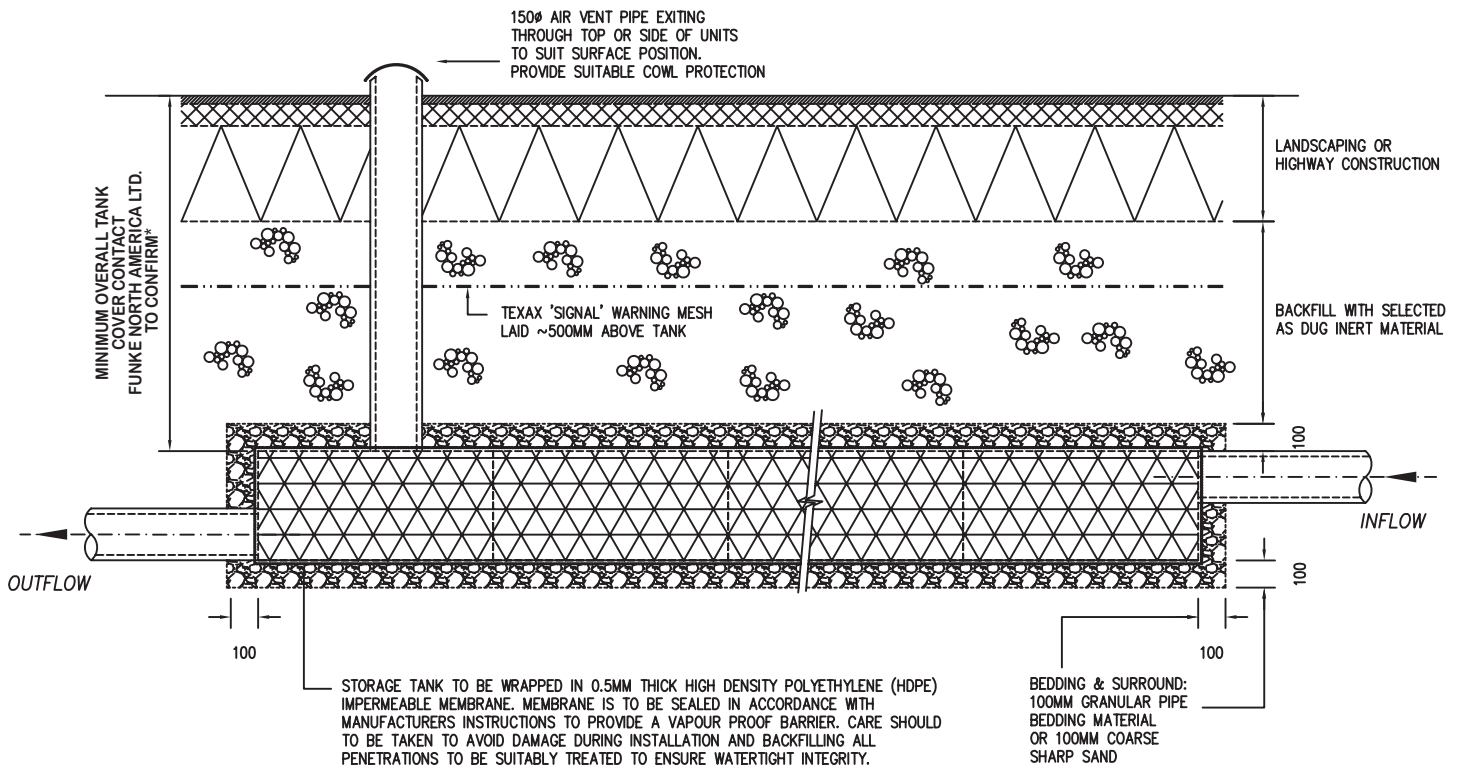

Overall cover allowance for preliminary design:

- A) Non-Trafficked Areas
Minimum 400mm cover
- B) Trafficked areas – Standard Tank
 - i) Cars and light vans not exceeding 2.5 tonnes between 0.4 to 2.0 meters cover
 - ii) Exceeds H2O loading with cover of 1.0 metre to 2.0 metres
- C) Trafficked areas – Heavy Duty Tank
 - i) Cars and light vans not exceeding 2.5 tonnes between 0.4 to 2.0 meters cover
 - ii) Exceeds H2O loading with cover of 1.0 metre to 2.2 metres

NB. The heavy duty tank loading capabilities are conservative.
Further testing indicates a higher loading may be adopted in future.

Tanks can be installed up to three layers high (1200mm)

D-Raintank[®]

ATTENUATION